

Enhanced efficiency for your TG-51, TRS-398, and annual QA requirements

with WP1D Water Phantom and
CCU [common control unit].

WP1D water phantom solution

The enhanced 1D water phantom solution enables your TG-51 and TRS-398 compliance with a simple setup.

Conduct your annual and routine Machine QA

- _ Connect with your existing myQA Accept software for efficient measurement
- _ Easy, efficient setup and handling saves time vs. larger 3D water phantom

Automate PDDs


- _ Use the same process as Blue Phantom² or SMARTSCAN

Measure output factors

- _ Field class dose measurements acquired with the CCU
- _ Reference class dose measurements in combination with the Dose 1 or Dose 2 electrometer

Complete dose calibrations

- _ In combination with the Dose 1 or Dose 2 dosimeter

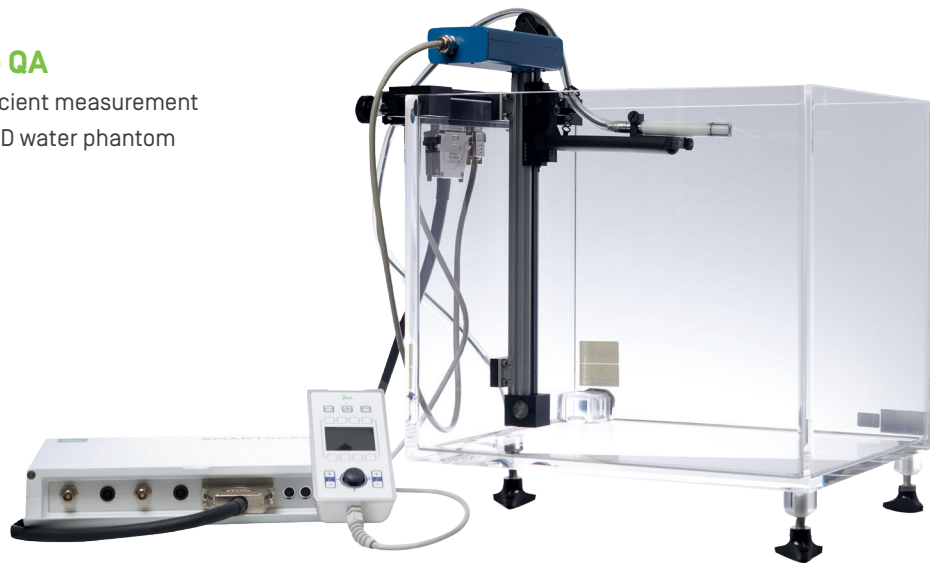

Time-saving and easy setup for your TG-51 and TRS-398 checks

WP1D




CCU Connection Cable

CCI



Wired Ethernet Connection

myQA Accept



Motor

Precision DC motor

Feedback

High linearity potentiometer

Position resolution

0.1 mm

Position accuracy

Fulfills TG-51 and TRS-398 requirements

Position reproducibility

+/- 0.1 mm

Maximum scanning length

250 mm

Weight

11 kg

Tank size

360 x 420 x 360 mm [outer dimensions]
340 x 400 x 350 mm [inner dimensions]

IBA Dosimetry

Independent & Integrated Quality Assurance
Europe, Middle East, Africa | +49-9128-607-38
North America and Latin America | +1 786 288 0369
Asia Pacific | +65 3129 2472
dosimetry-info@iba-group.com | iba-dosimetry.com
Rev. WP1D -CCU_Br_E_Rev2_0922

Certified



Corporation

